

Cat. **Pelle Luxury**

Cat. Pelle Luxury

Star

bolzan

STAR



PHYSICAL SPEC.

**COLOUR FASTNESS
TO-AND-FRO RUBBING**

UNI EN ISO 11640
500 dry cycles,
≥ 4 degradation, ≥ 4 staining
UNI EN ISO 11640
250 wet cycles,
≥ 3/4 degradation, ≥ 3/4staining
UNI EN ISO 11640
80 alk. perspiration cycles,
≥ 3/4 degradation, ≥ 3/4staining

**COLOUR FASTNESS
TO LIGHT**

EN ISO 105-B02
xenotest, ≥ 4 blue scale

TEAR STRENGTH

UNI EN ISO 3377-1
≥ 20 N

WATER SPOTTING

UNI EN ISO 15700
≥ 3 grey scale

FINISH ADHESION

UNI EN ISO 11640
≥ 2 N/cm

FLEXING ENDURANCE

UNI EN ISO 5402
≥ 50.000 cycles

**COLD CRACK RESISTANCE OF
FINISH**

UNI EN ISO 3377-1
-15° , no crack

FIRE RESISTANCE

UNI EN 1021-1, UNI EN 1021-2,
BS 5852/0, BS 5852/1

TECHNICAL SPEC.

THICKNESS

0,9 - 1,0 mm

TANNING


mineral chrome

COLOR TYPE

solid tone

DYEING

through-dyeing Aniline

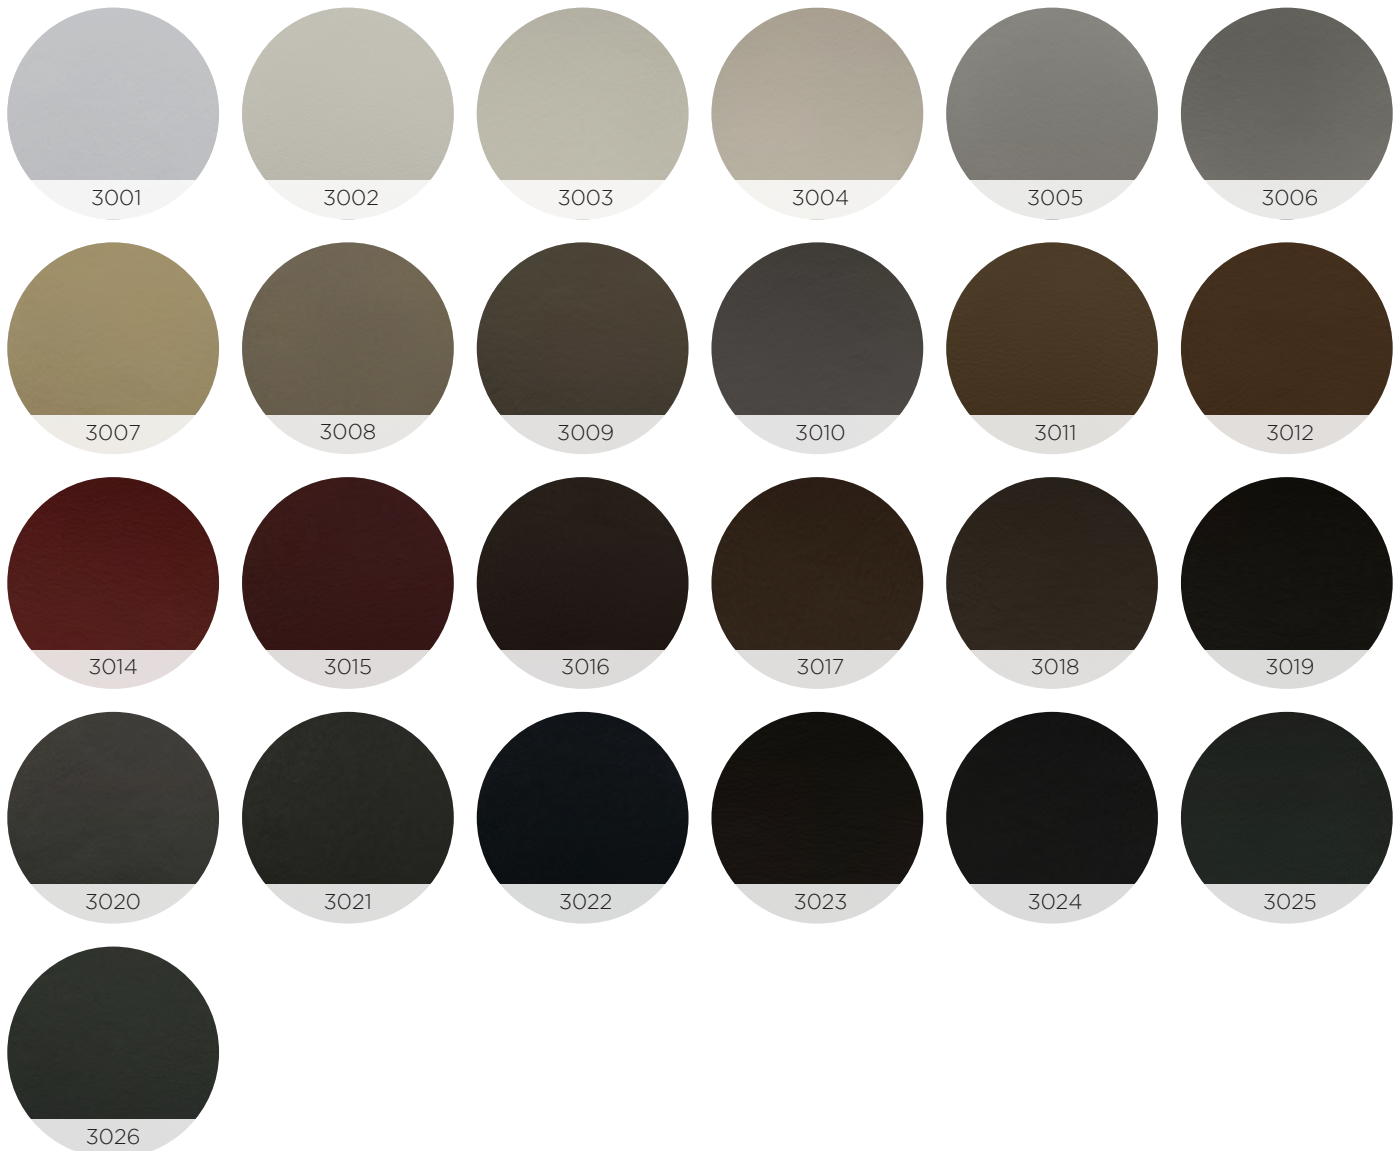



bolzan

Cat. **Pelle Luxury**

Cat. Pelle Luxury

Seta

bolzan

SETA



PHYSICAL SPEC.

**COLOUR FASTNESS
TO-AND-FRO RUBBING**

UNI EN ISO 11640
500 dry cycles,
≥ 4 degradation, ≥ 4 staining
UNI EN ISO 11640
250 wet cycles,
≥ 3/4 degradation, ≥ 3/4staining
UNI EN ISO 11640
80 alk. perspiration cycles,
≥ 3/4 degradation, ≥ 3/4staining

**COLOUR FASTNESS
TO LIGHT**

EN ISO 105-B02
xenotest, ≥ 4 blue scale

TEAR STRENGHT

UNI EN ISO 3377-1
≥ 20 N

WATER SPOTTING

UNI EN ISO 15700
≥ 3 grey scale

FINISH ADHESION

UNI EN ISO 11640
≥ 2 N/cm

FLEXING ENDURANCE

UNI EN ISO 5402
≥ 50.000 cycles

**COLD CRACK RESISTANCE OF
FINISH**

UNI EN ISO 3377-1
-15° , no crack

FIRE RESISTANCE

UNI EN 1021-1, UNI EN 1021-2,
BS 5852/0, BS 5852/1

TECHNICAL SPEC.

RAW MATERIAL/APPEARANCE
bovine/natural grain

THICKNESS

0,9 - 1,0 mm

TANNING


mineral chrome


COLOR TYPE

solid tone

DYEING

through-dyeing Aniline

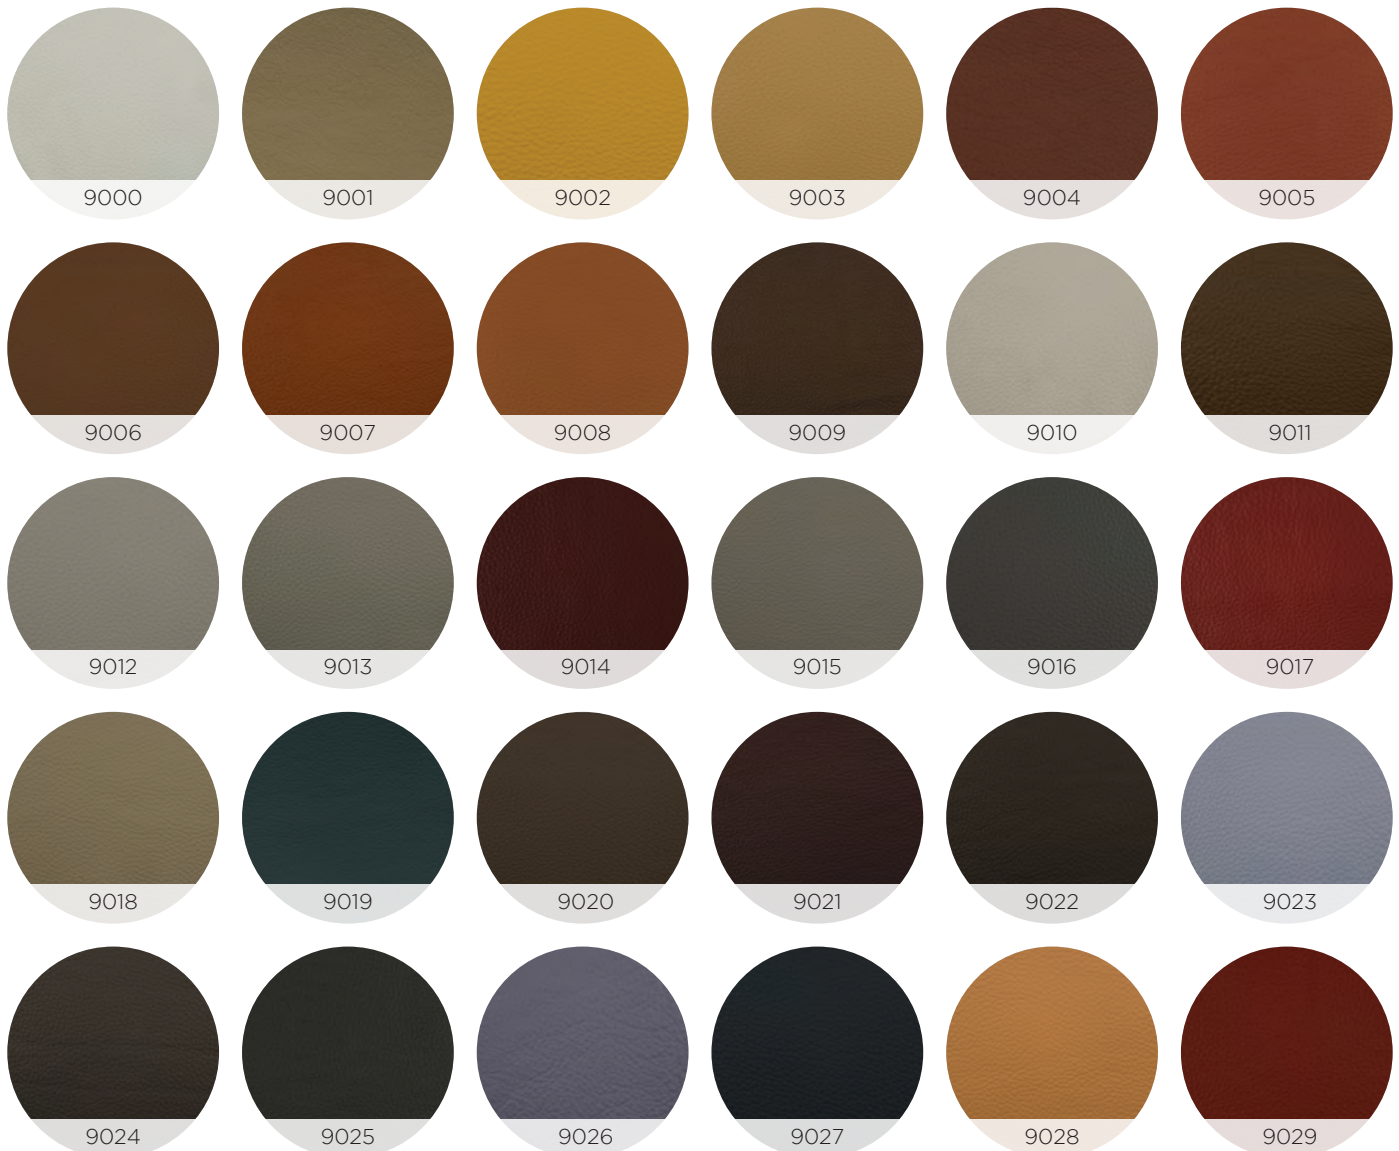

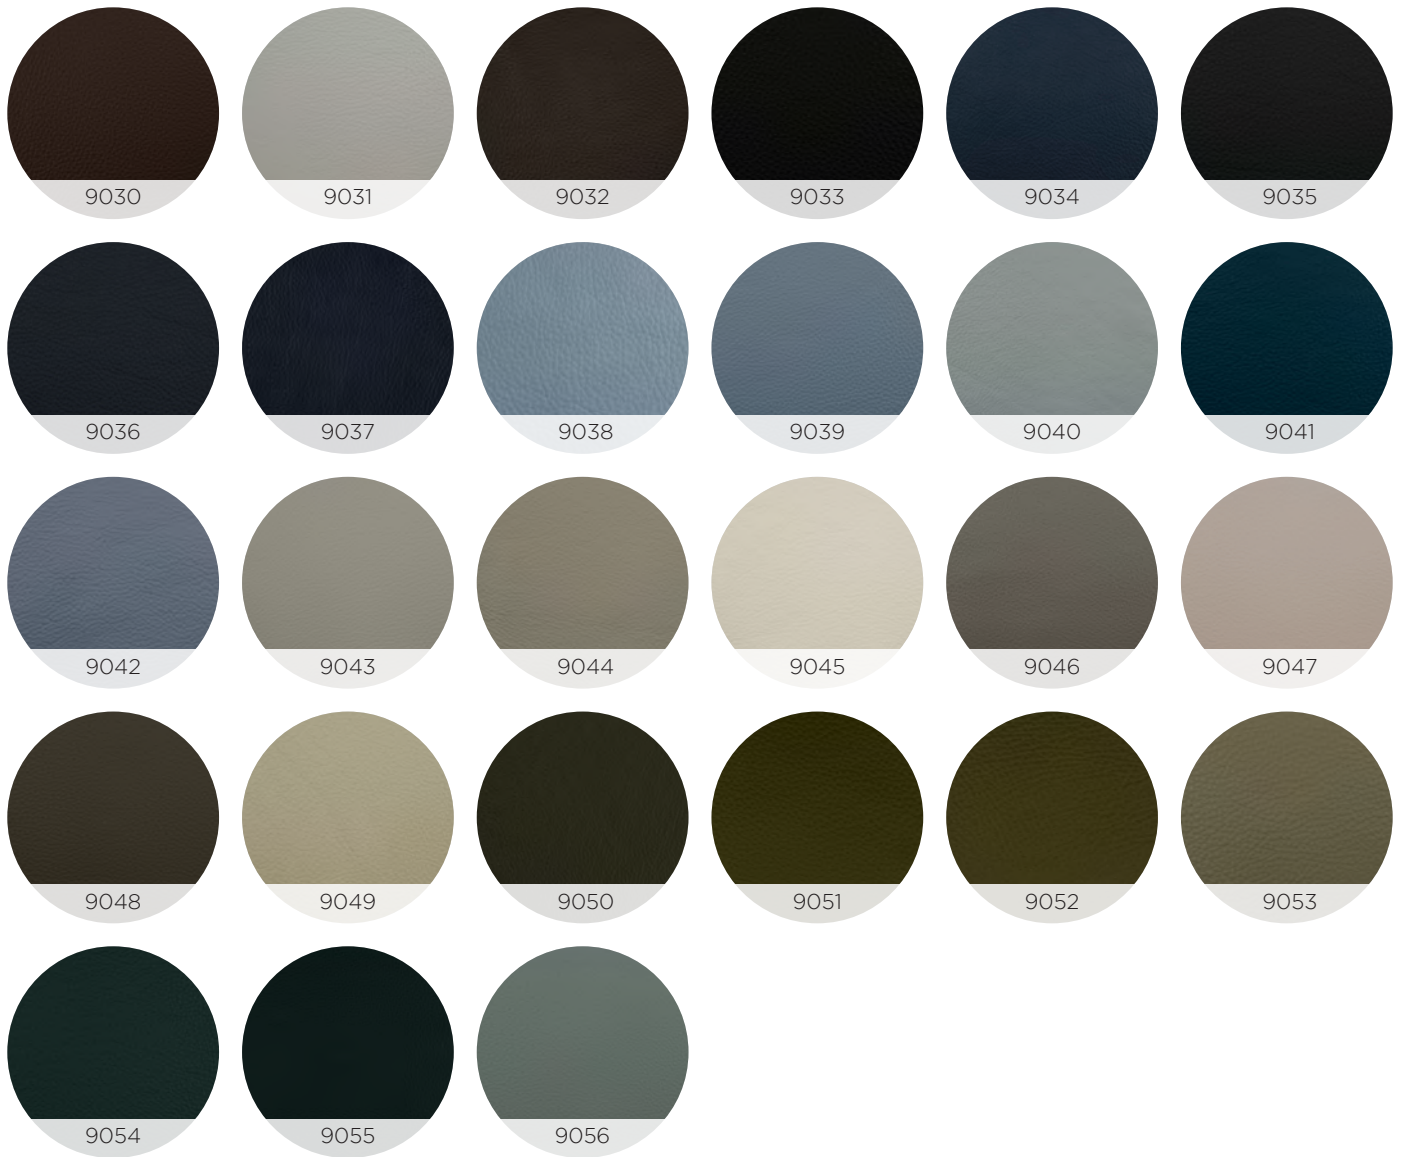



bolzan