

**COMPOSITION**  
55% POL  
45% polyurethane fibre

---

**COLOUR FASTNESS TO LIGHT**  
Note 4-5  
UNI EN ISO 105-B02

---

**PILLING**  
Note 4-5  
UNI EN ISO 12945-2

---

**MARTINDALE**  
50.000 rubs  
UNI EN ISO 12947-2

---

water repellent treatment




**CARE**

---

**NOTES**  
Slight differences in colour may occur



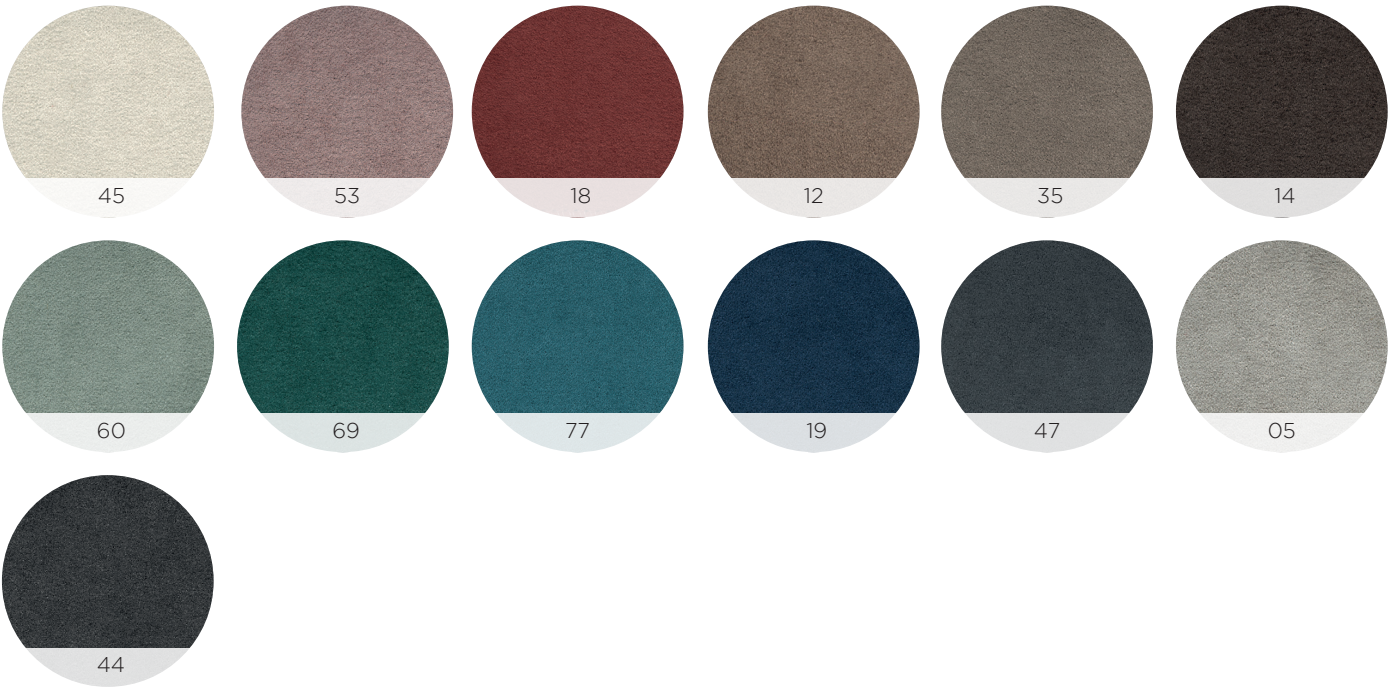

**COMPOSITION**

75% cotton  
20% acrylic  
5% polyester

**COLOUR FASTNESS  
TO LIGHT**


Note 5  
UNI EN ISO 105-B02

**PILLING**



Note 3-4  
UNI EN ISO 12945-2

**MARTINDALE**


65.000 rubs  
UNI EN ISO 12947-2

**CARE****NOTES**


Slight differences in colour may occur

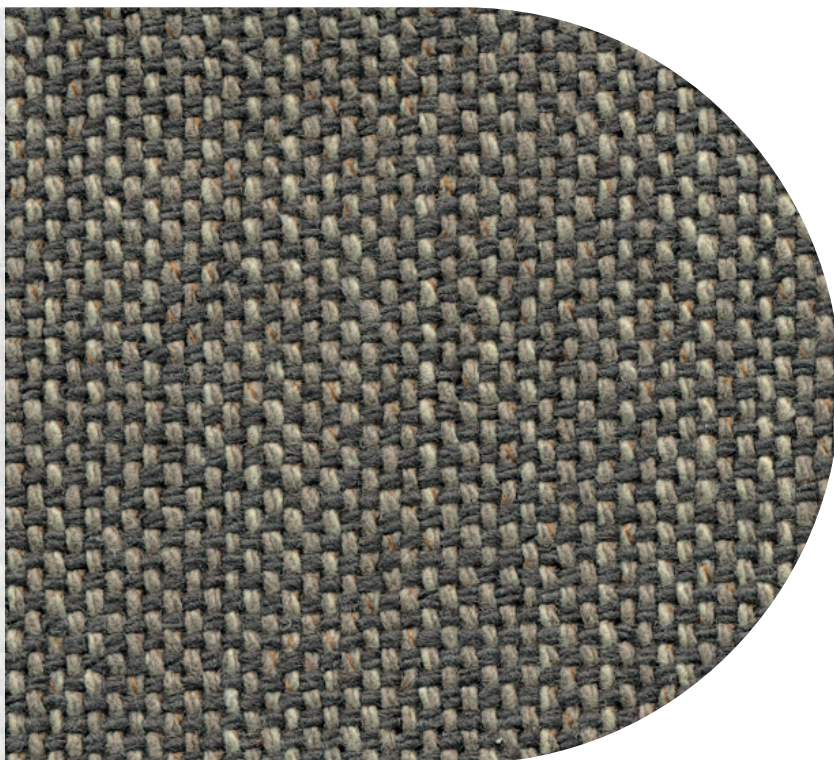


01




03




04




08



10




11



09



12



13



## COMPOSITION

100% polyester

## PILLING

Note 5

UNI EN ISO 12945-2


## MARTINDALE

45.000 rubs

UNI EN ISO 12947-2



anti stain treatment

## CARE



## NOTES

Slight differences in colour may occur

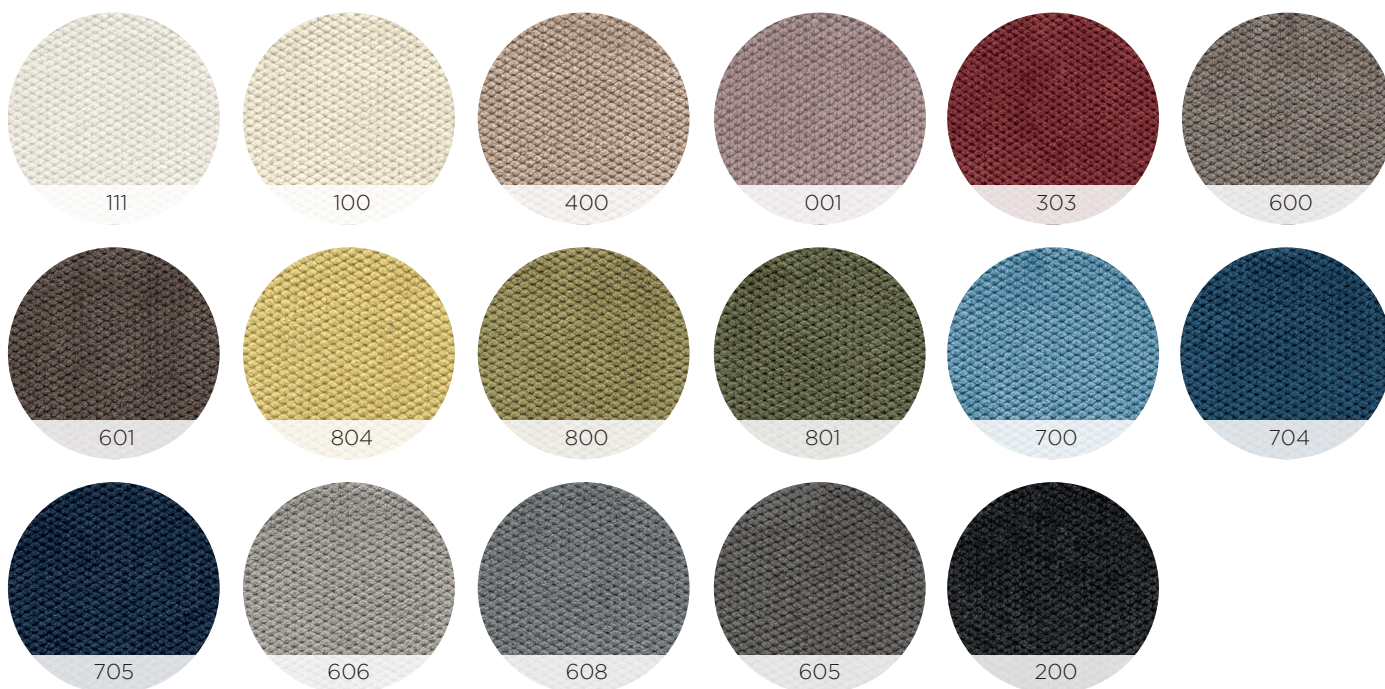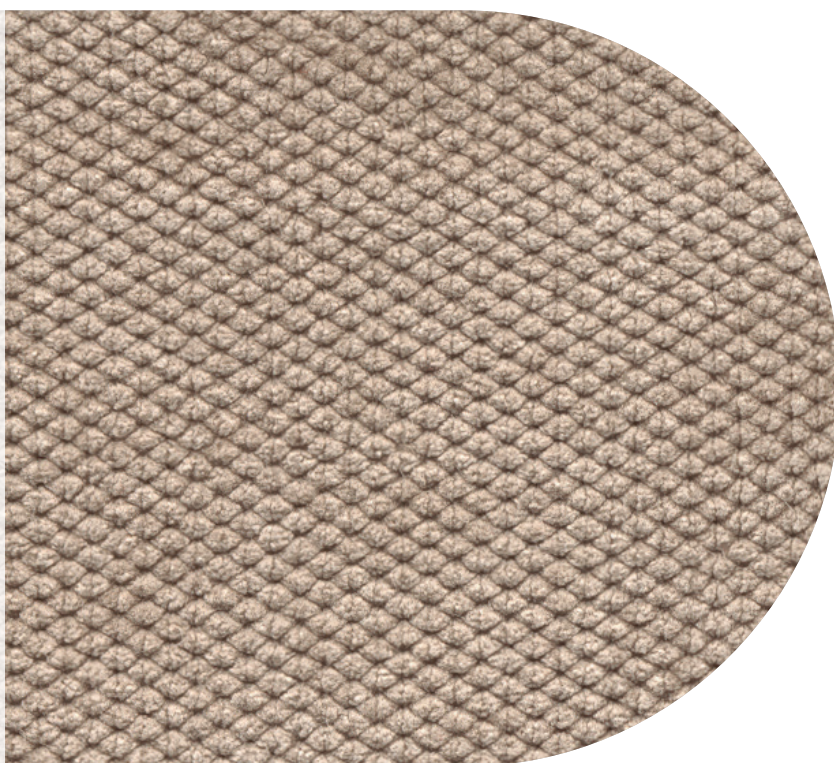



**COMPOSITION**  
85% cotton  
15% viscose

---

**COLOUR FASTNESS  
TO LIGHT**  
Note 4-5  
UNI EN ISO 105-B02

---

**PILLING**  
Note 4  
UNI EN ISO 12945-2

---

**MARTINDALE**  
80.000 rubs  
UNI EN ISO 12947-2

---


anti stain treatment

**CARE**

---

**NOTES**  
Slight differences in colour may occur



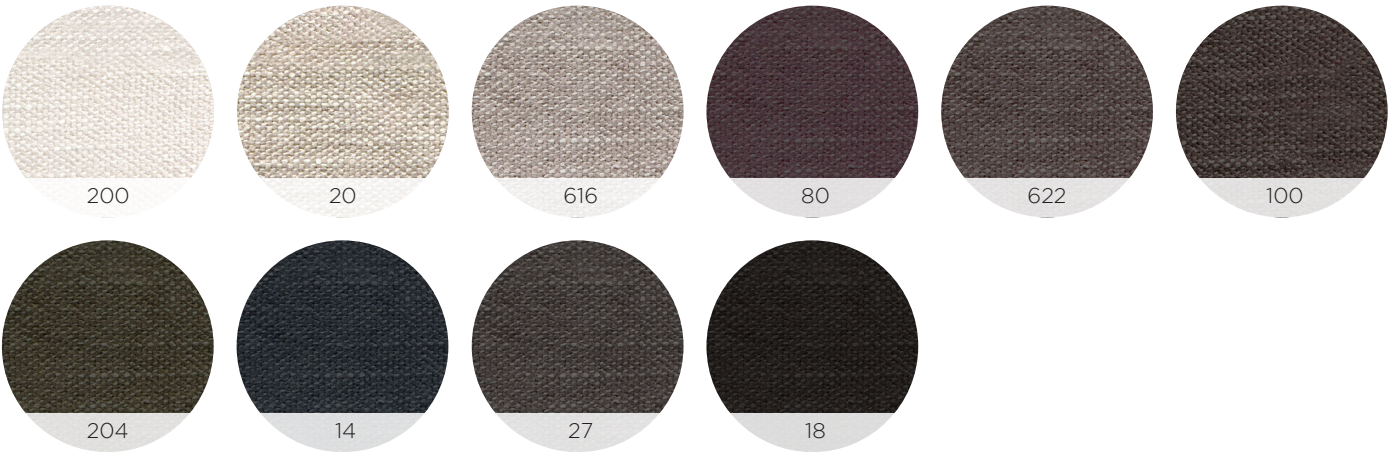

**COMPOSITION**

100% polyester

**COLOUR FASTNESS**

**TO LIGHT**

Note 4

UNI EN ISO 105-B02

**PILLING**

Note 4-5

UNI EN ISO 12945-2


**MARTINDALE**

100.000 rubs

UNI EN ISO 12947-2


water repellent treatment

**CARE**



**NOTES**

Slight differences in colour may occur

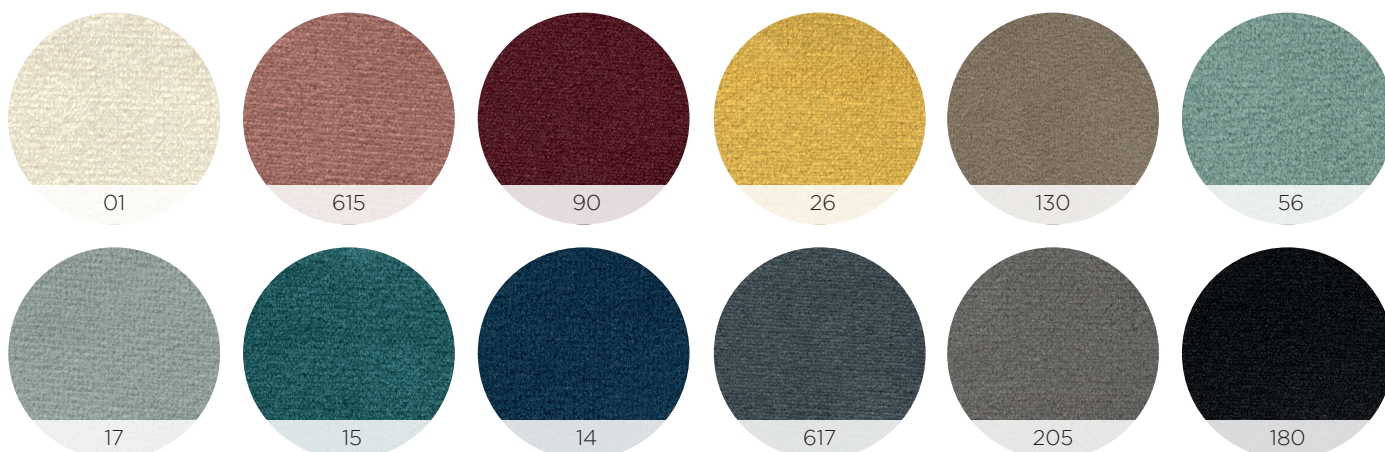



100% polyester

**COLOUR FASTNESS  
TO LIGHT**  
Note 3/4  
UNI EN ISO 105-B02

Note 4  
UNI EN ISO 12945-2

40.000 rubs  
UNI EN ISO 12947-2

water repellent treatment  
anti stain treatment

Slight differences in colour may occur



111



602




406



403



601



600



200



**COMPOSITION**

100% polyester

**COLOUR FASTNESS****TO LIGHT**

Note 3/4

UNI ENI ISO 105-B02

**PILLING**

Note 4-5

UNI ENI ISO 12945-2


**MARTINDALE**

70.000 rubs



UNI ENI ISO 12947-2

water repellent treatment

anti stain treatment

**CARE****NOTES**

Slight differences in colour may occur

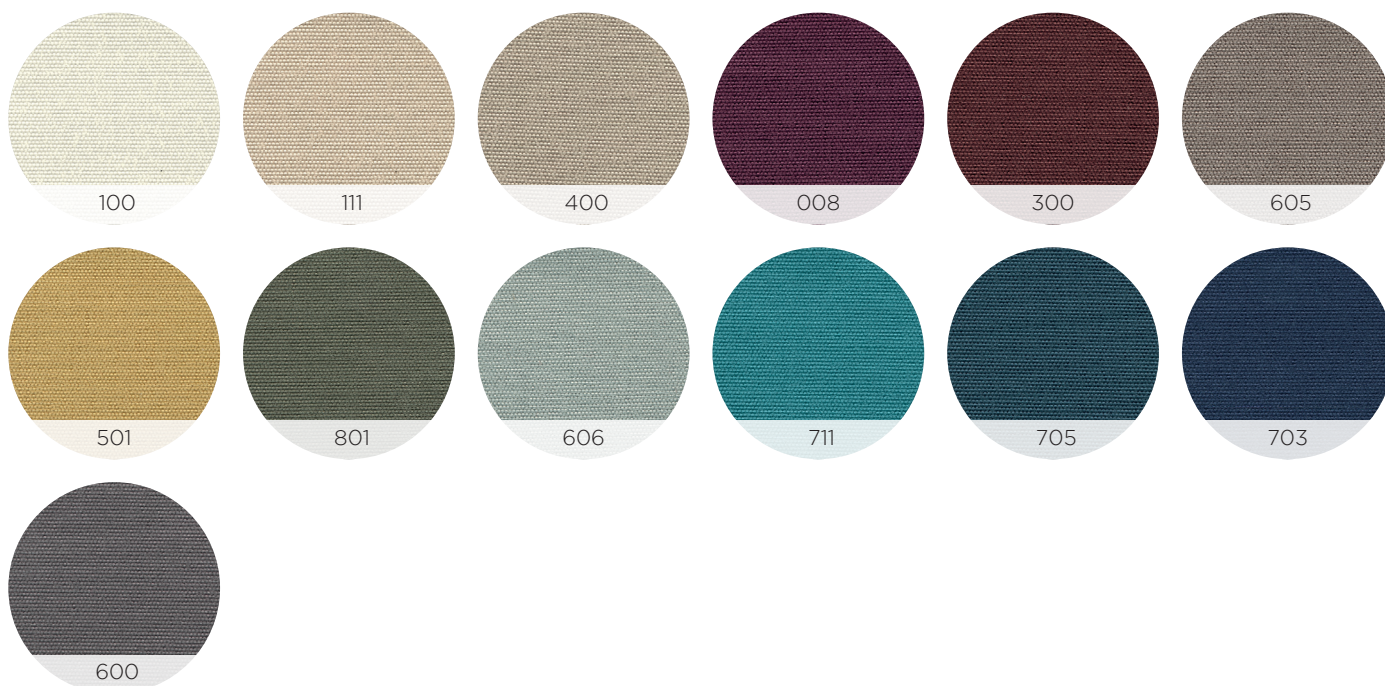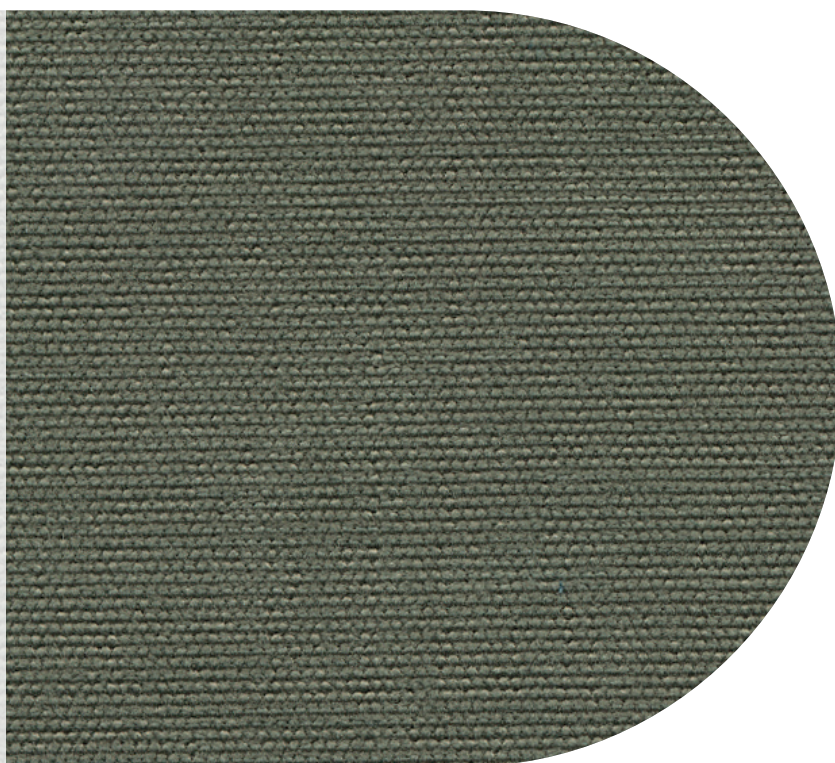



**COMPOSITION**  
100% cotton

---

**PILLING**  
Note 5 @ 2.000  
UNI ENI ISO 12945-2

---


**MARTINDALE**  
30.000 rubs  
UNI ENI ISO 12947-2


---

**CARE**  


---

**NOTES**  
Slight differences in colour may occur

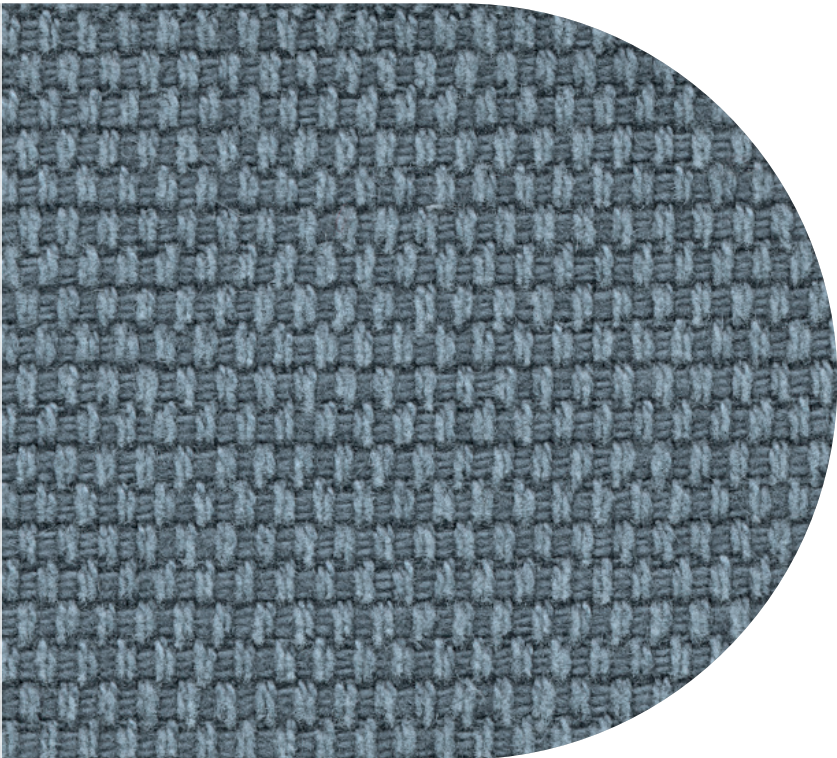

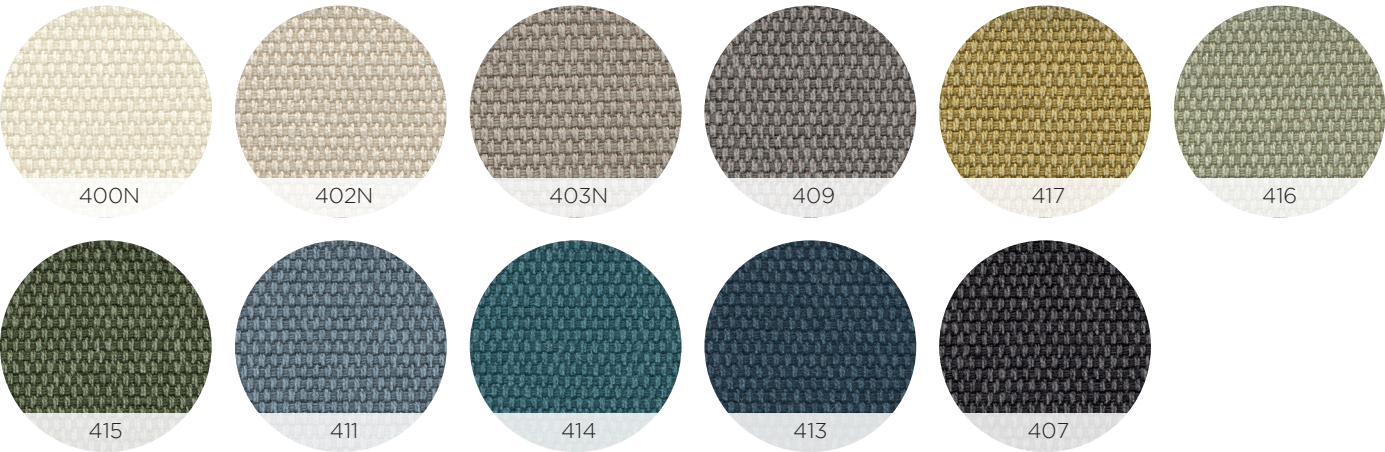



**COMPOSITION**  
38% acrylic  
28% polyester  
20% cotton  
14% wool

---

**COLOUR FASTNESS  
TO LIGHT**  
Note 5-6  
UNI EN ISO 105-B02

---

**PILLING**  
Note 5  
UNI EN ISO 12945-2

---

**MARTINDALE**  
100.000 rubs  
UNI EN ISO 12947-2

---



**FIRETEST**  
EN 1021 part 1-2  
UNI 9175 classe 1IM  
BS5852 source 0 and 1

---

**CARE**  


---

**NOTES**  
Slight differences in colour may occur

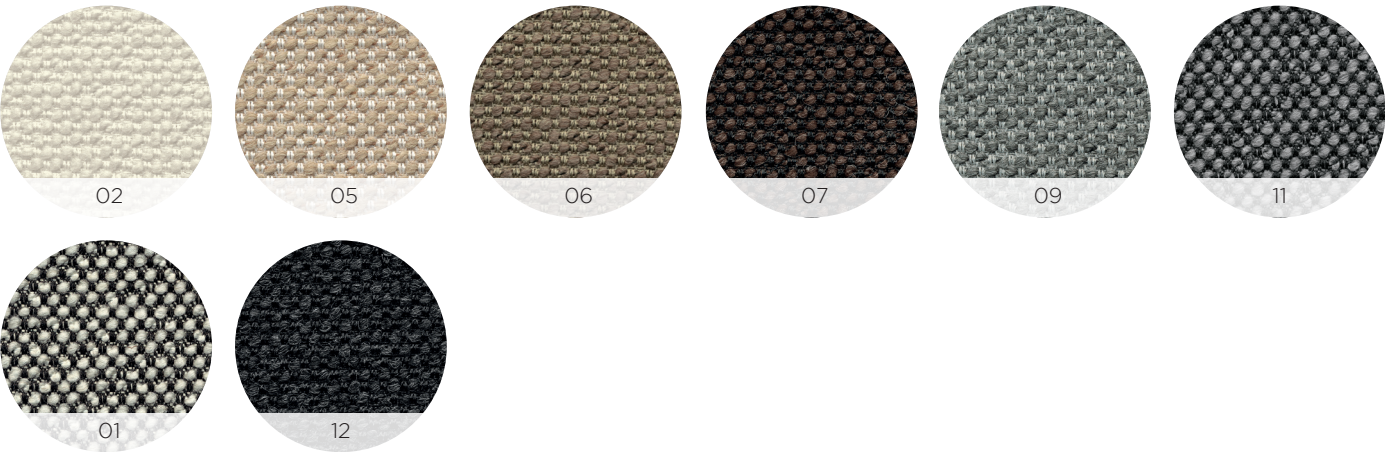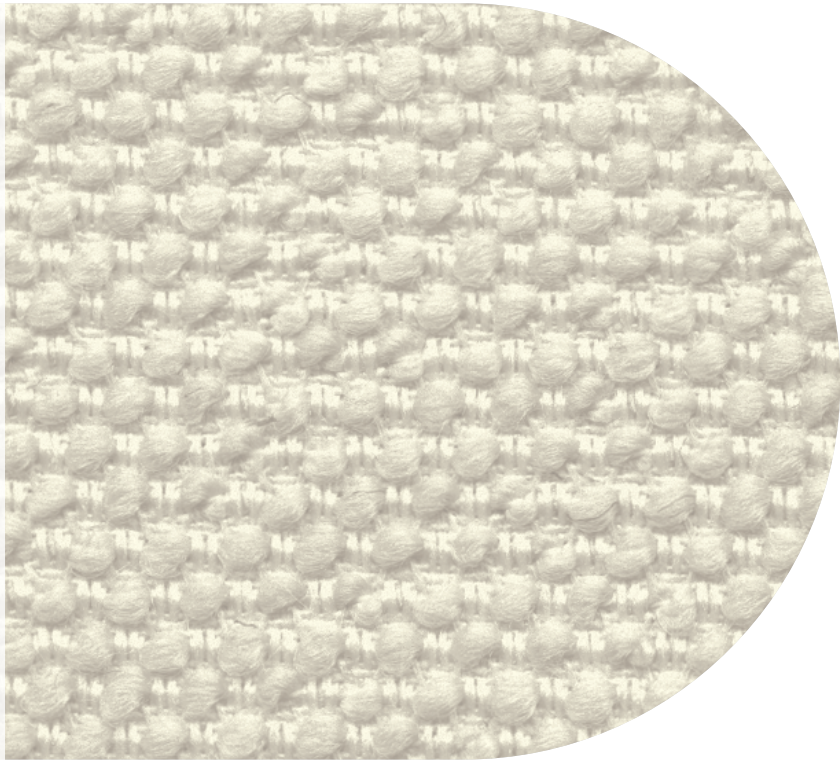



**COMPOSITION**  
82% linen  
18% cotton

---

**COLOUR FASTNESS  
TO LIGHT**  
Note 4  
UNI EN ISO 105-B02

---

**PILLING**  
Note 4 @ 2.000  
UNI EN ISO 12945-2

---


**MARTINDALE**  
35.000 rubs  
UNI EN ISO 12947-2


---

**CARE**  


---

**NOTES**  
Slight differences in colour may occur

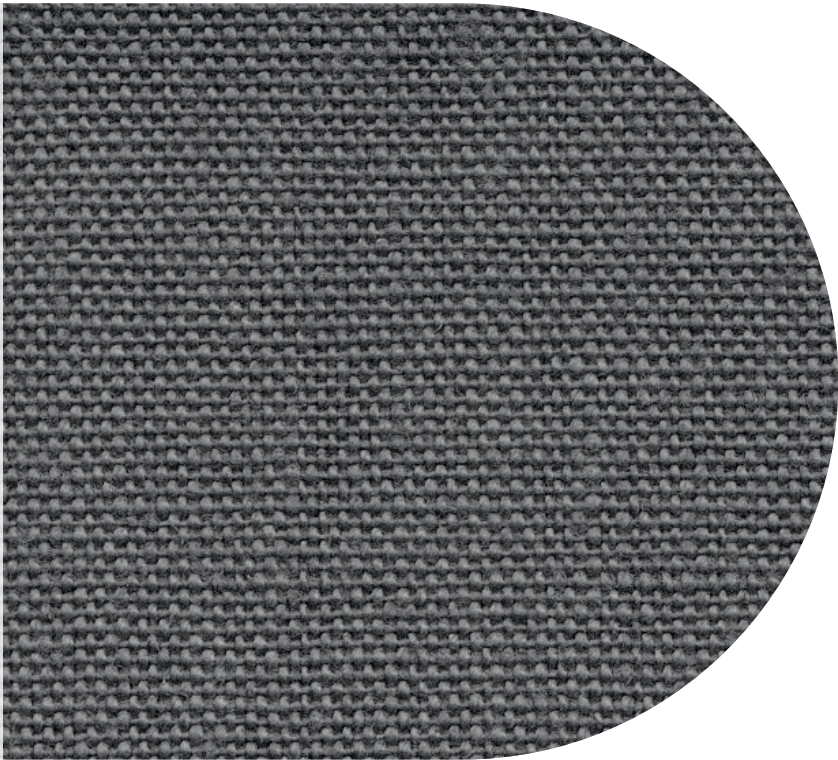

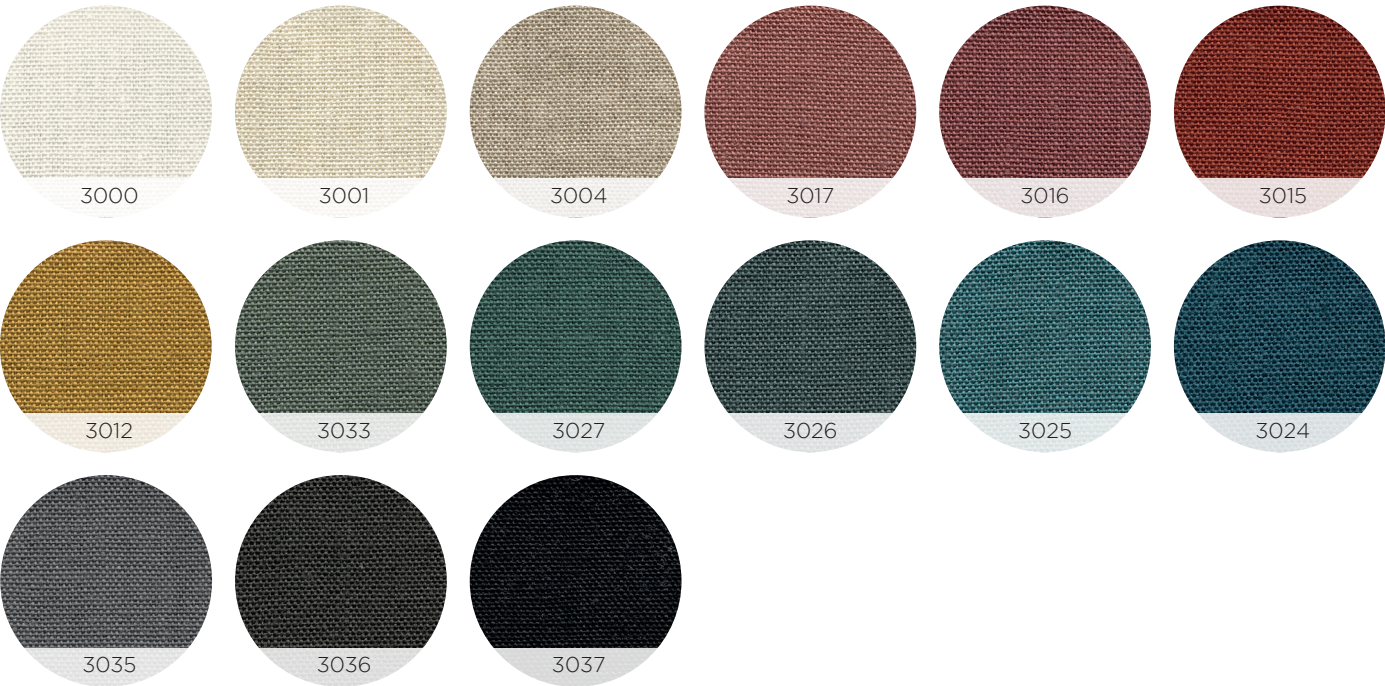



COMPOSITION

50% polyester

50% cotton

COLOUR FASTNESS TO LIGHT

Note 5-6

UNI EN ISO 105-B02

PILLING

Note 5

UNI EN ISO 12945-2

MARTINDALE

100.000 rubs

UNI EN ISO 12947-2

FIRETEST

EN 1021 part 1-2

UNI 9175 classe 1IM

BS5852 source 0 and 1


CARE

30°

P

NOTES

Slight differences in colour may occur

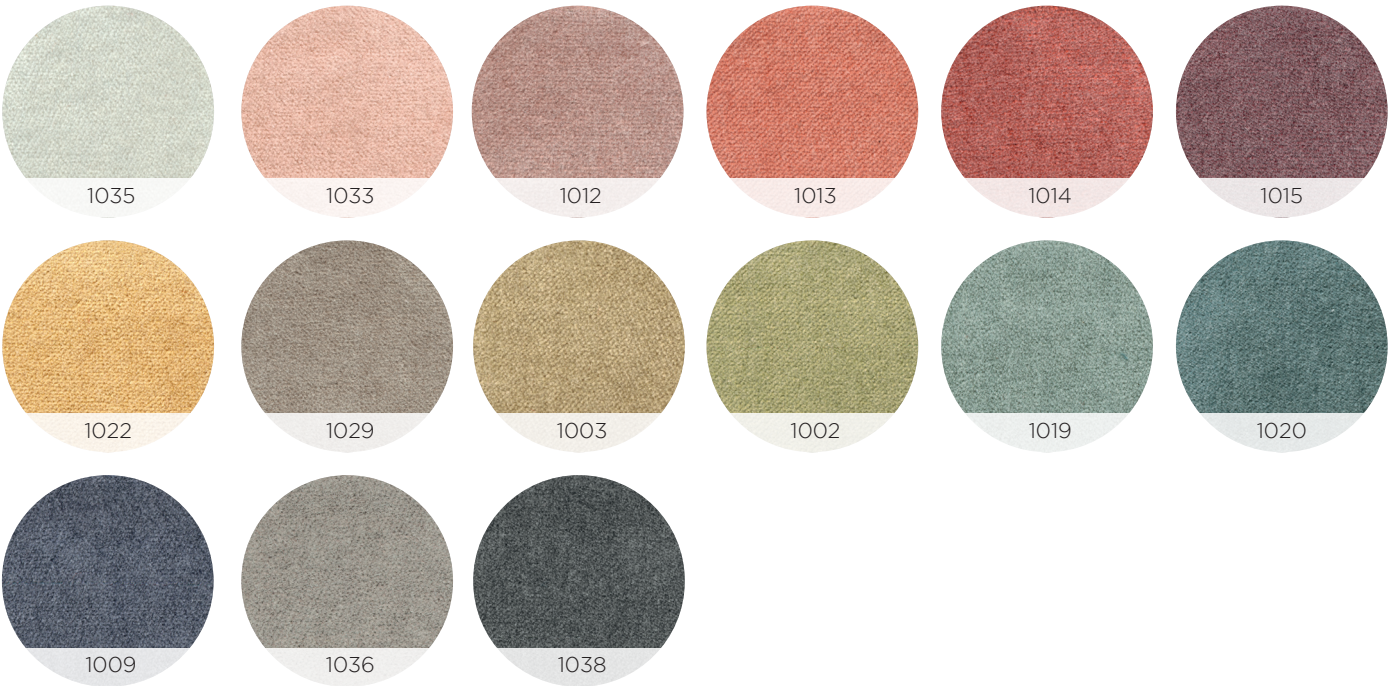



**COMPOSITION**  
100% cotton

---

**PILLING**  
Note 5  
UNI EN ISO 12945-2

---


**MARTINDALE**  
25.000 rubs  
UNI EN ISO 12947-2

**CARE**

---

**NOTES**  
Slight differences in colour may occur



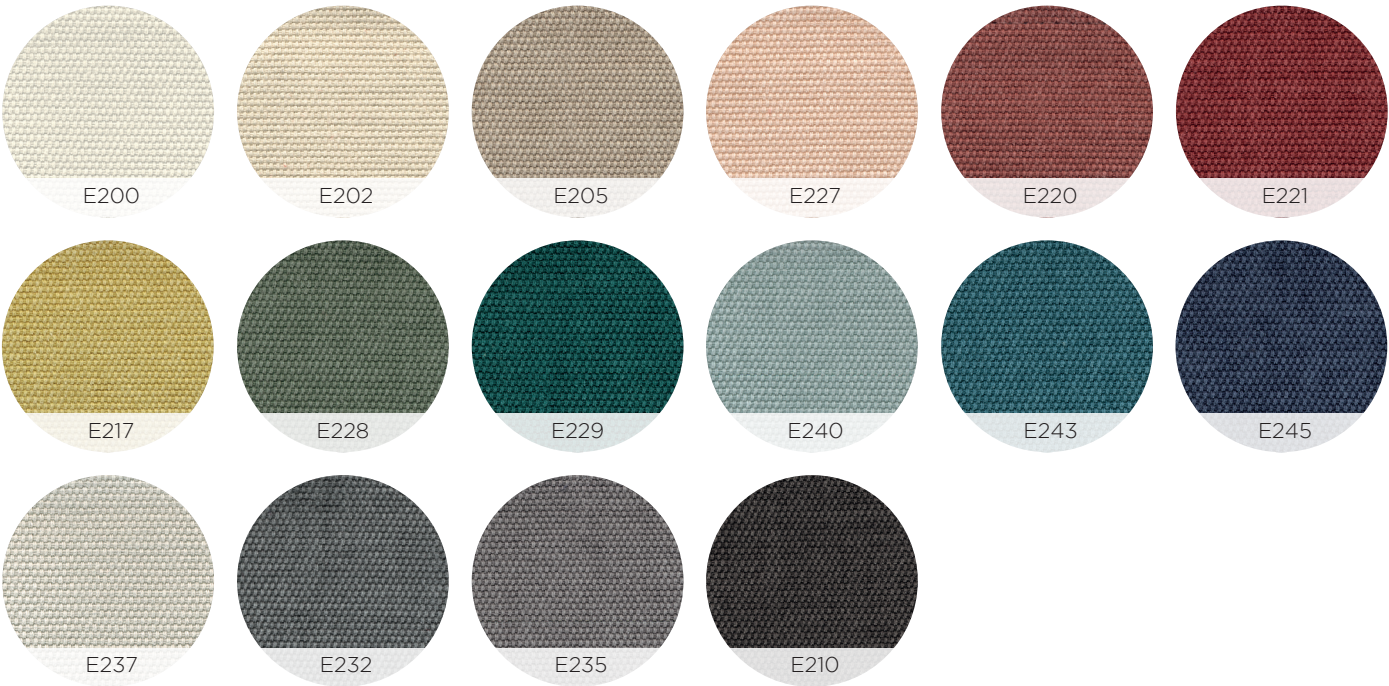

**COMPOSITION**

60% PES FR TREVIRA  
40% PES FR

**COLOUR FASTNESS  
TO LIGHT**

Note 6-7  
EN ISO 105-B02

**PILLING**

Note 3-4 @ 5000 rubs  
ISO 12945

**MARTINDALE**



11.000 rubs  
UNI EN ISO 12947-2

**CARE**




**NOTES**


Slight differences in colour may occur

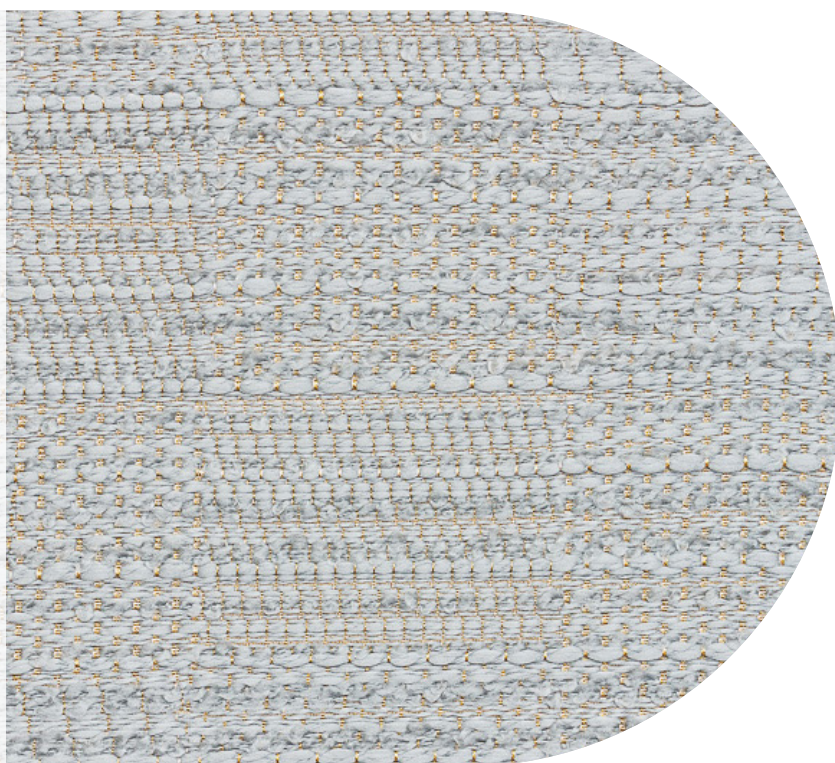


010



012




014




011




004




005




006



007



008



013



**COMPOSITION**

100% PES

**COLOUR FASTNESS**

**TO LIGHT**

Note 3-4

EN ISO 105-B02

**PILLING**

Note 5 @ 5.000 rubs

ISO 12945

**MARTINDALE**

40.000 rubs


UNI ENI ISO 12947-2

**CARE**



**NOTES**


Slight differences in colour may occur

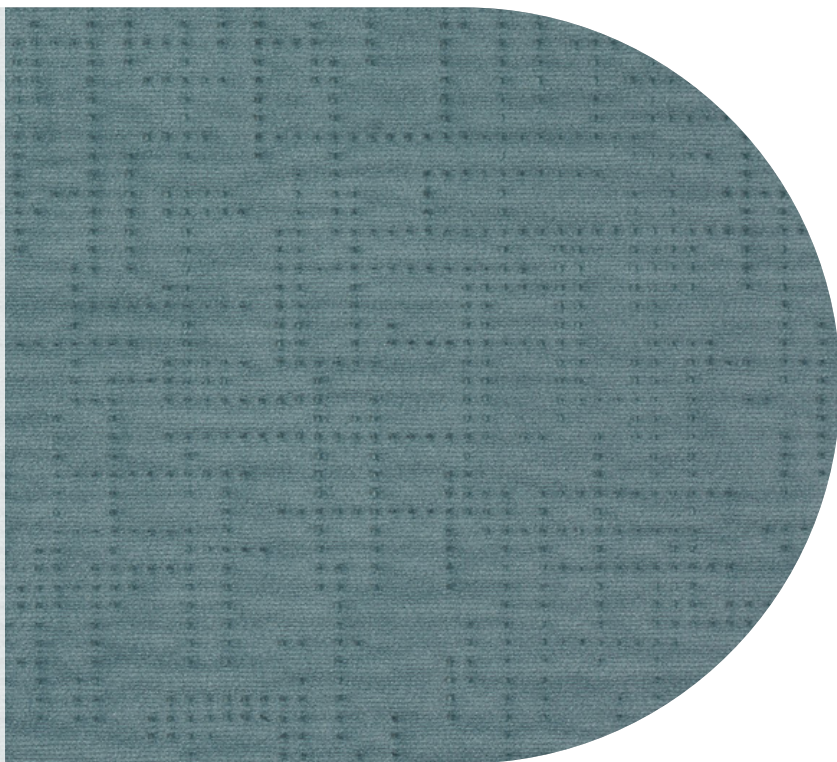


012



013



014



015




007




001




008




004




002



010



016



011



**COMPOSITION**

90% new wool  
10% nylon

**COLOUR FASTNESS  
TO LIGHT**

Note 5-7  
ISO 105-B02

**PILLING**

Note 4-5  
EN ISO 12945

**MARTINDALE**



100.000 rubs  
EN ISO 12947

**FIRETEST**

EN 1021 - 1/2; DIN 4102 B2; Önorm B1/Q1;  
NF D60 013; UNI 9175 11M; IMO A.652(16);  
US Cal Tech Bull 117; BS 5852 part 1;  
BS 5852 ignition source 2-3

**CARE****NOTES**

Slight differences in colour may occur

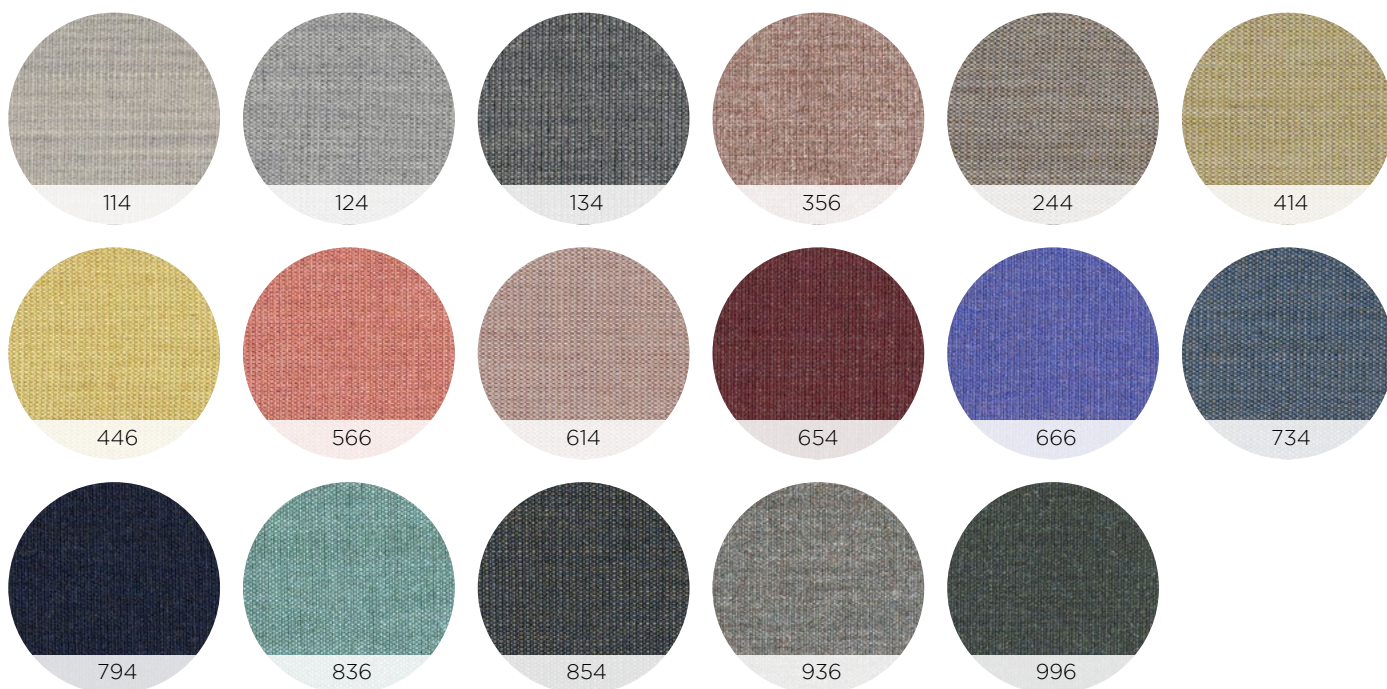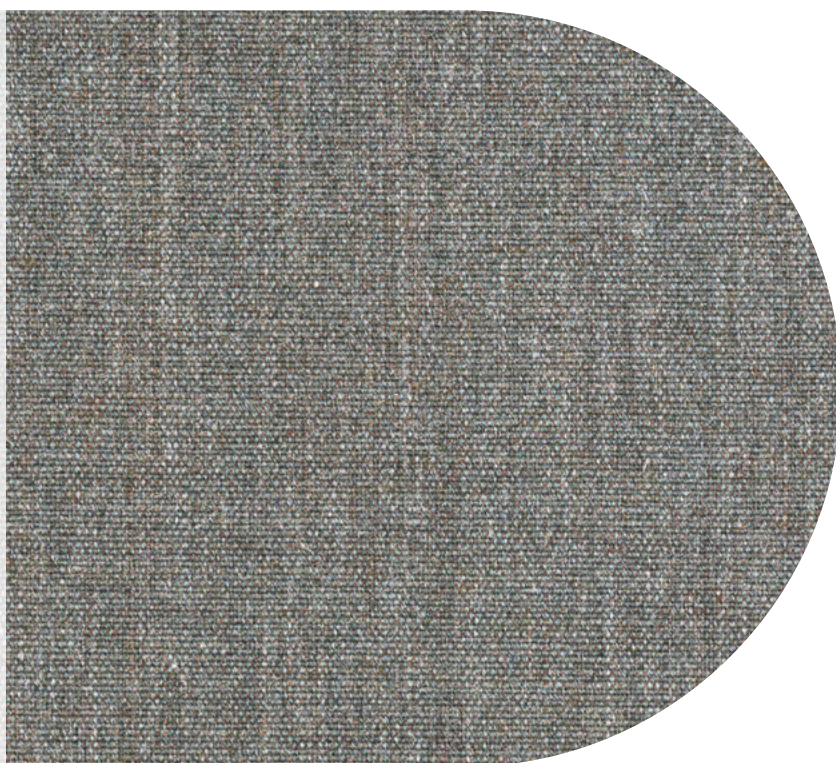



**COMPOSITION**

92% new wool  
8% nylon

**COLOUR FASTNESS  
TO LIGHT**

Note 6-7  
ISO 105-B02

**PILLING**


Note 4-5  
EN ISO 12945

**MARTINDALE**



100.000 rubs  
EN ISO 12947

**FIRETEST**

BS 5852 ignition source 3; BS 5852 part1;  
EN 1021 - 1/2; Önorm B2/Q1; NF D60 013;  
UNI 9175 IIM; IMO FTP code 2010: part8;  
US Cal Bull 117-2013;

**CARE****NOTES**

Slight differences in colour may occur

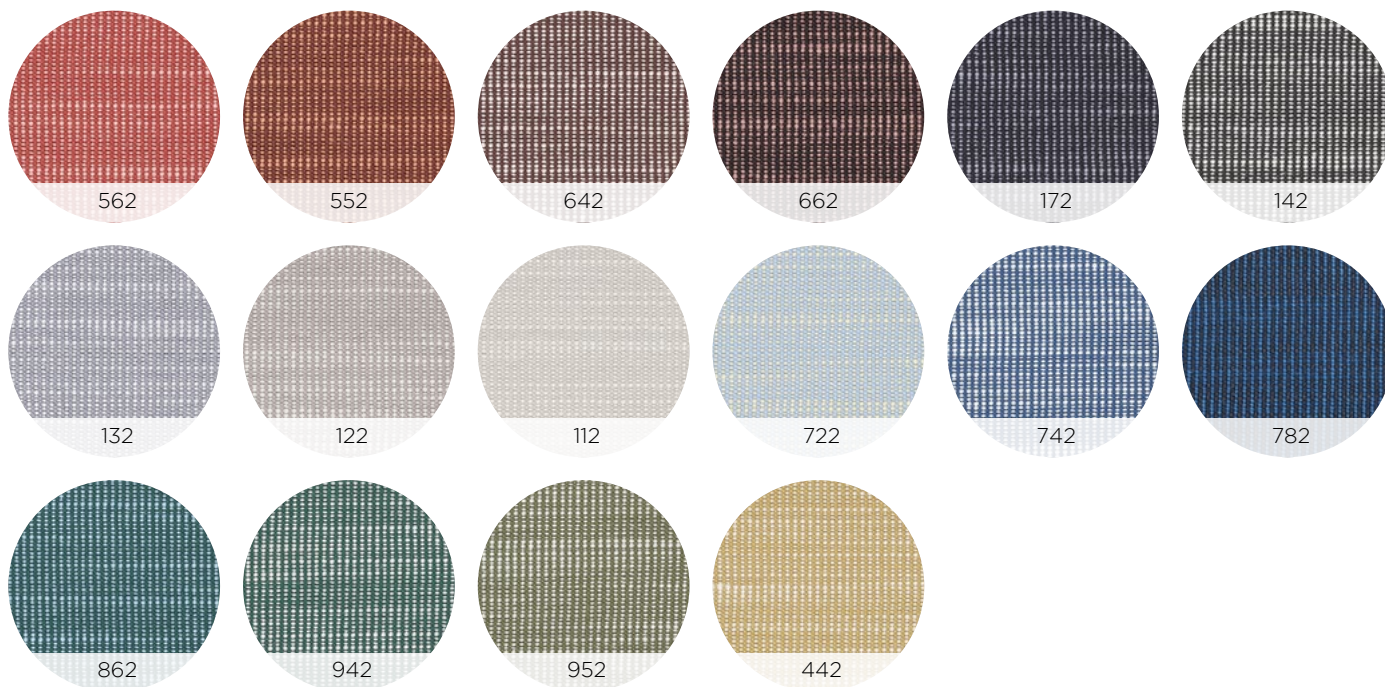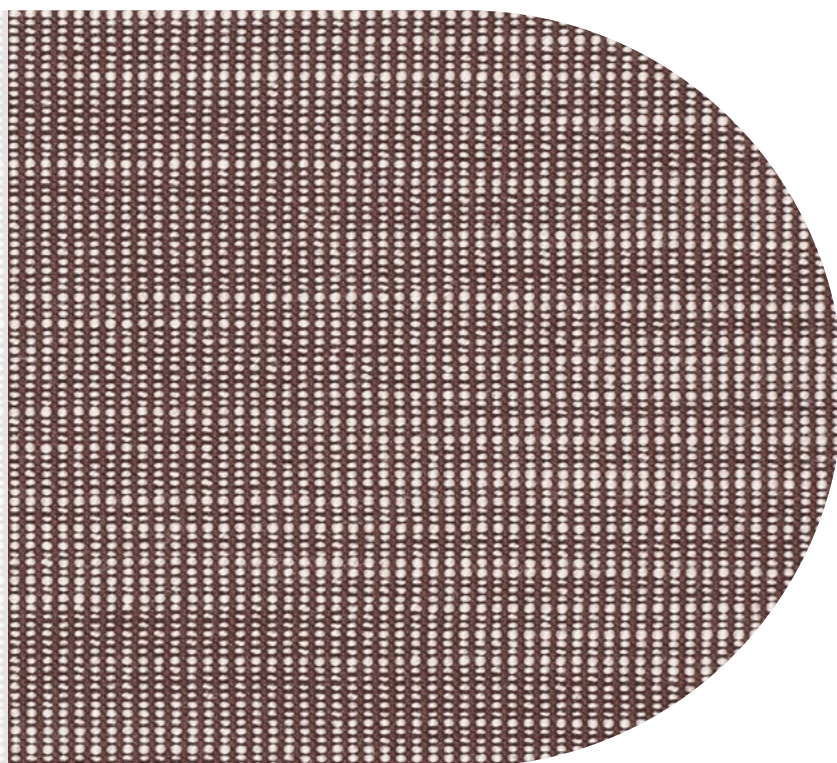



**COMPOSITION**

90% new wool  
10% nylon

**COLOUR FASTNESS  
TO LIGHT**

Note 6  
ISO 105-B02

**PILLING**

Note 4  
EN ISO 12945

**MARTINDALE**

60.000 rubs  
EN ISO 12947

**FIRETEST**



EN 1021-1/2; NF D60 013; UNI 9175 11M;  
IMO FTP code 2010:part8;  
US Cal Bull 117-2013; BS 5852 part1;  
BS 5852 crib 5 with treatment

**CARE**



**NOTES**

Slight differences in colour may occur

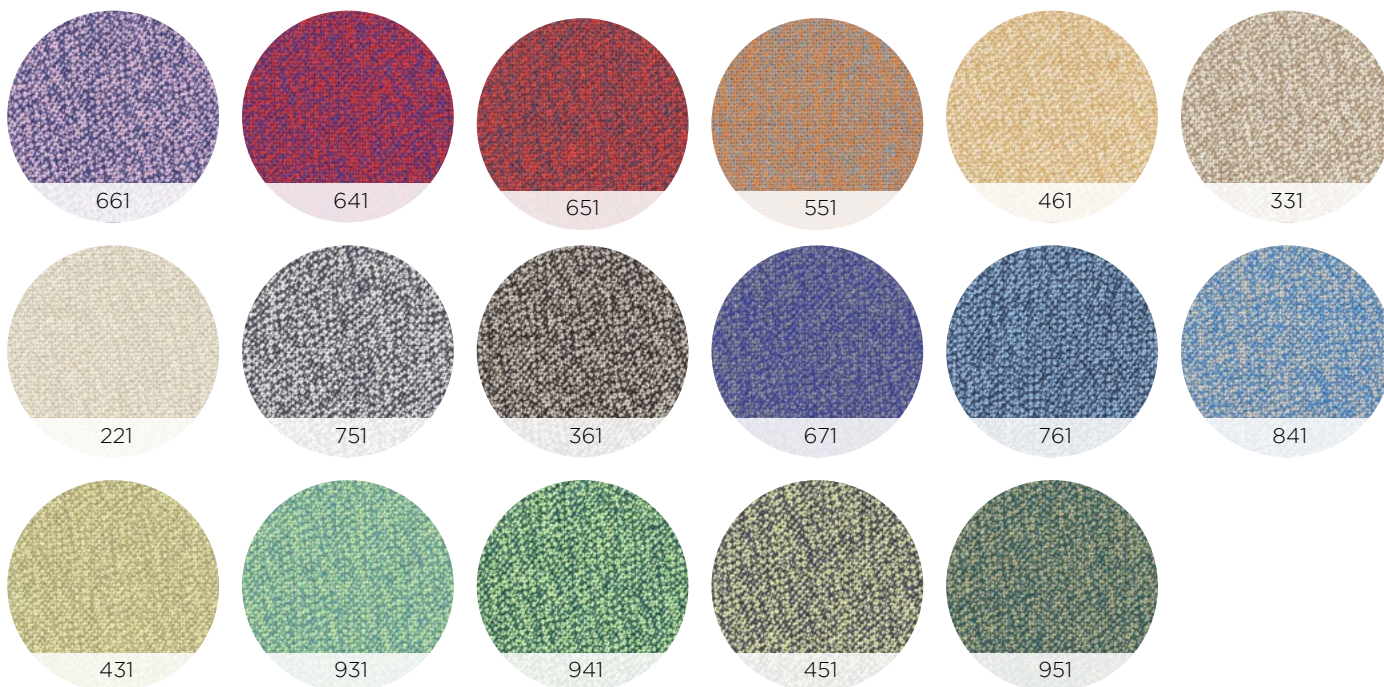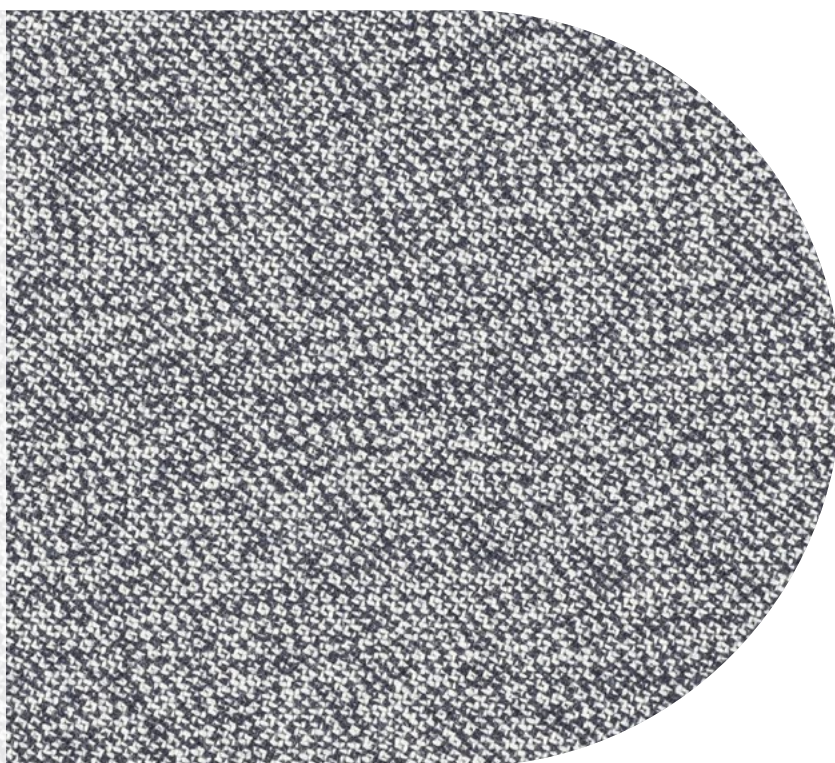



**COMPOSITION**

40% polyamide  
29% spun ryon  
29% cotton  
2% a

**COLOUR FASTNESS  
TO LIGHT**

Note 4-5 average


**MARTINDALE**

50.000 rubs

**FIRETEST**










UK cigarette BS5852 source 0

**CARE**



**NOTES**

Slight differences in colour may occur

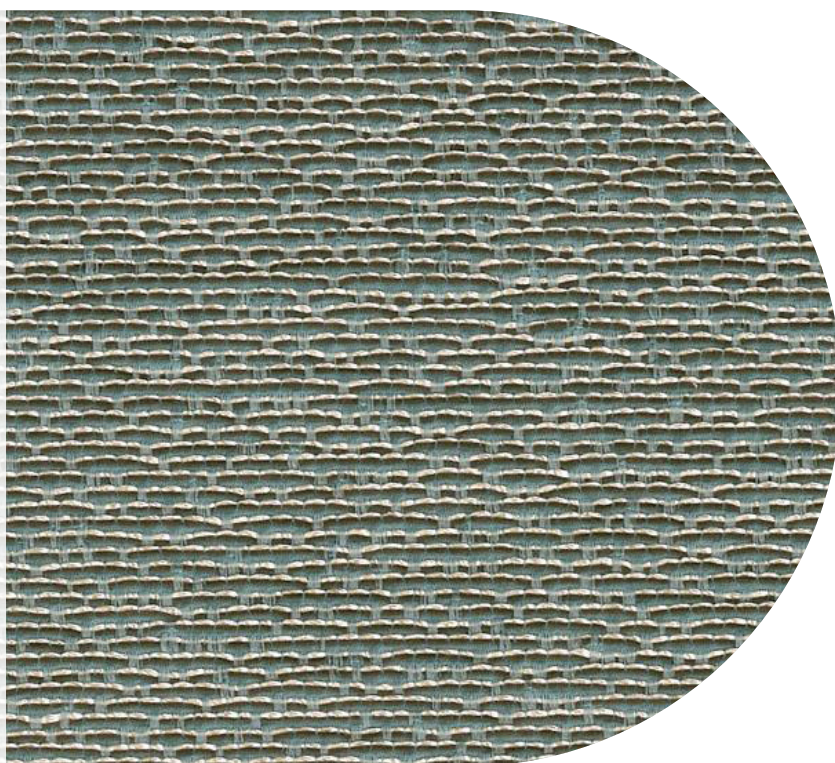



**COMPOSITION**

100% polyester Trevira CS

**COLOUR FASTNESS**

**TO LIGHT**

Note 4-5 average

**MARTINDALE**

20.000 rubs

**EXTRA**

Germany B1 DIN 4102-1

UK contract upholstery BS7176

UK contract curtains BS5867

Italia Classe 1 Tendaggi

France M1

NFP902-503-504-505


IMO 8 upholstery

**CARE**



**NOTES**

Slight differences in colour may occur

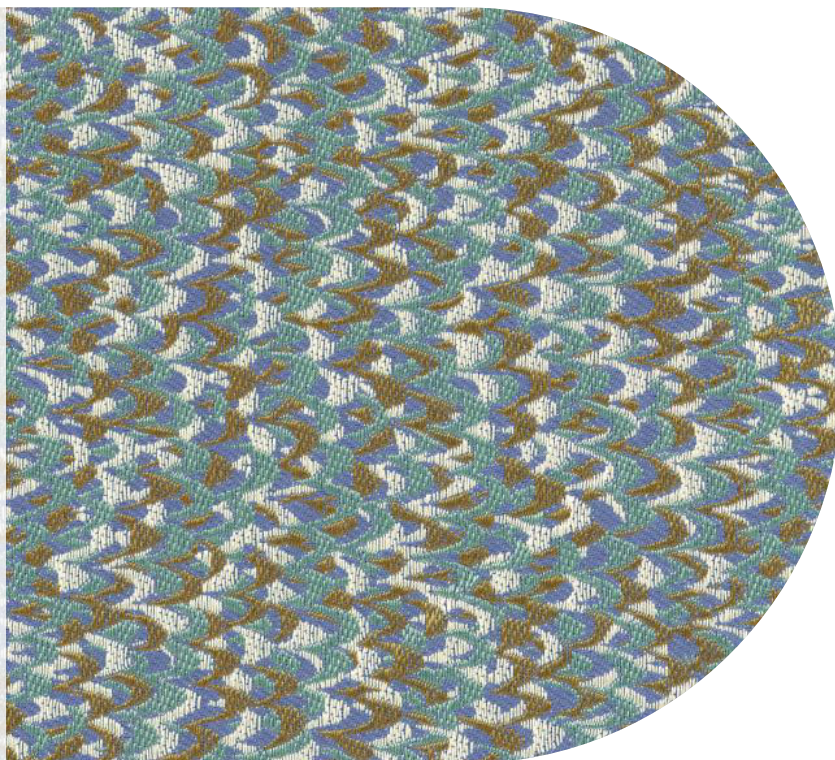

09



10



03



01



02



04




08



06



05



07



**COMPOSITION**

56% polyester  
44% polyamide

**COLOUR FASTNESS  
TO LIGHT**

Note 4-5 average


**MARTINDALE**

45.000 rubs

**FIRETEST**

UK cigarette BS5852 source 0

**CARE**



**NOTES**

Slight differences in colour may occur





**PHYSICAL SPEC.**

**COLOUR FASTNESS**

**TO-AND-FRO RUBBING**

UNI EN ISO 11640  
500 dry cycles,  
≥ 4 degradation, ≥ 4 staining  
UNI EN ISO 11640  
250 wet cycles,  
≥ 3/4 degradation, ≥ 3/4staining  
UNI EN ISO 11640  
80 alk. perspiration cycles,  
≥ 3/4 degradation, ≥ 3/4staining

**COLOUR FASTNESS**

**TO LIGHT**

EN ISO 105-B02  
xenotest, ≥ 4 blue scale

**TEAR STRENGHT**

UNI EN ISO 3377-1  
≥ 20 N

**WATER SPOTTING**

UNI EN ISO 15700  
≥ 3 grey scale

**FINISH ADHESION**

UNI EN ISO 11640  
≥ 2 N/cm

**FLEXING ENDURANCE**

UNI EN ISO 5402  
≥ 50.000 cycles

**COLD CRACK RESISTANCE OF FINISH**

UNI EN ISO 3377-1  
-15° , no crack

**FIRE RESISTANCE**

UNI EN 1021-1, UNI EN 1021-2,  
BS 5852/0, BS 5852/1

**TECHNICAL SPEC.**

**RAW MATERIAL/APPEARANCE**

bovine/natural grain

**THICKNESS**

0,9 - 1,0 mm

**TANNING**

mineral chrome

**COLOR TYPE**


solid tone

**DYEING**

through-dyeing Aniline





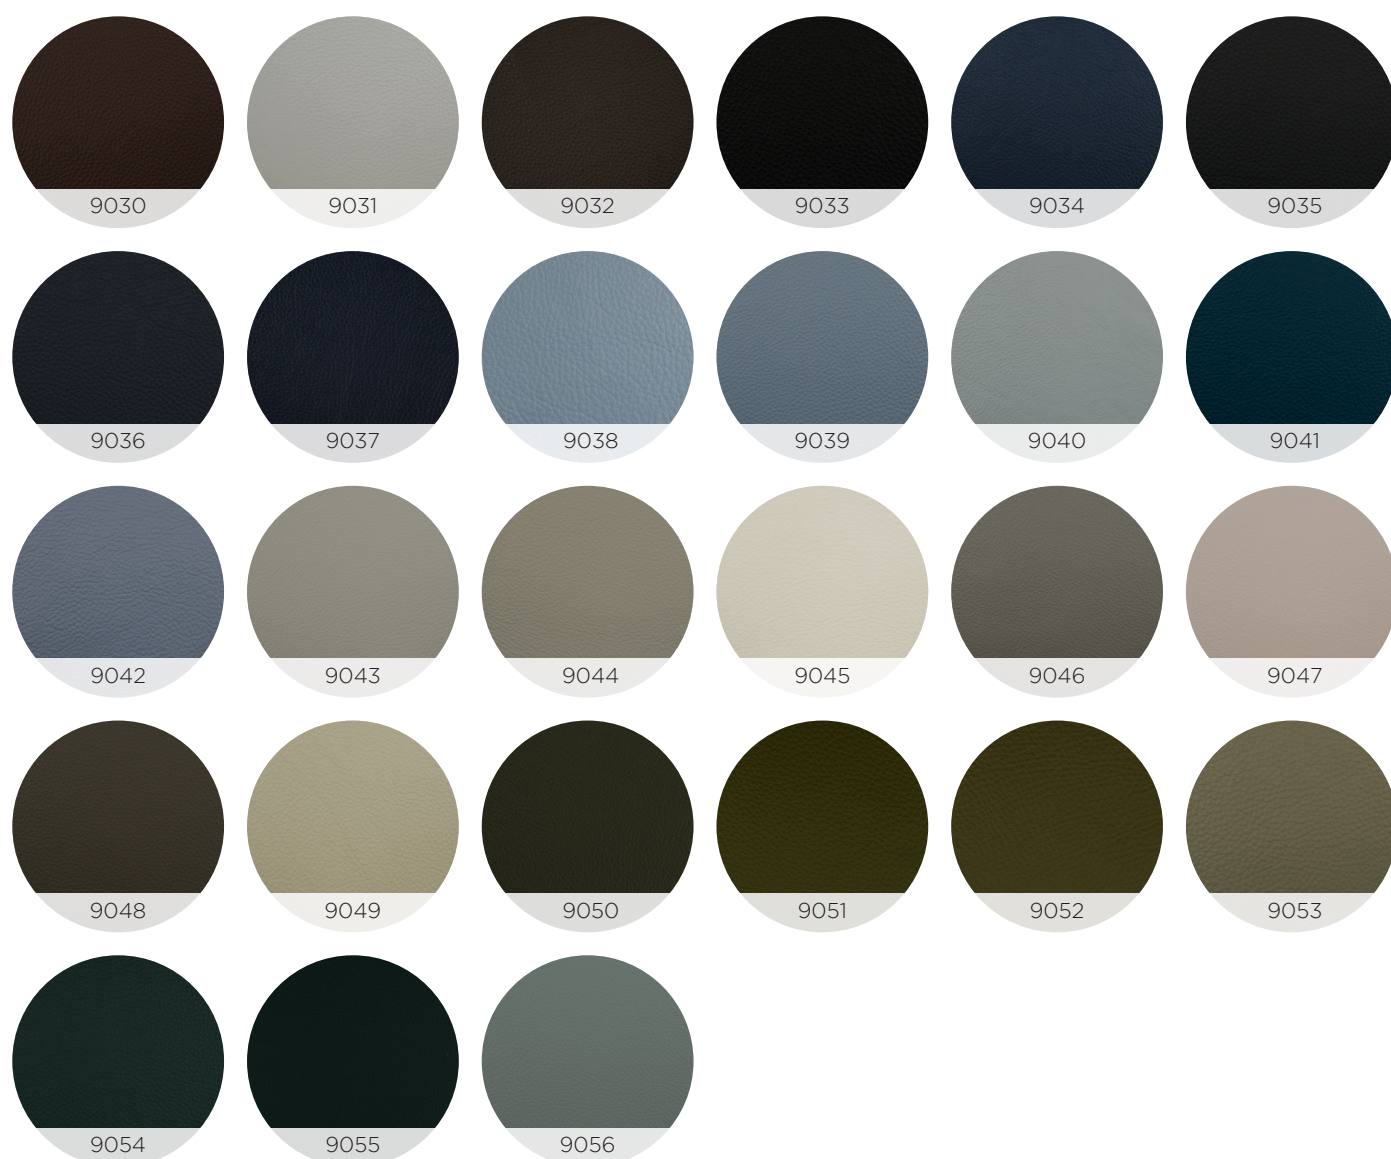

#### GENERAL WARNINGS

slight differences in colour may occur

#### MAINTENANCE AND CLEANING

dust with a soft and dry cloth; remove stains using a damp cloth and neutral soap or a delicate detergent. Buffer from the edges to the stain centre. No abrasive/aggressive products; no product for shoes cleaning; no steam; no direct sunlight; no direct heat



**PHYSICAL SPEC.**

**COLOUR FASTNESS**

**TO-AND-FRO RUBBING**

UNI EN ISO 11640  
500 dry cycles,  
≥ 4 degradation, ≥ 4 staining  
UNI EN ISO 11640  
250 wet cycles,  
≥ 3/4 degradation, ≥ 3/4staining  
UNI EN ISO 11640  
80 alk. perspiration cycles,  
≥ 3/4 degradation, ≥ 3/4staining

**COLOUR FASTNESS  
TO LIGHT**

EN ISO 105-B02  
xenotest, ≥ 4 blue scale

**TEAR STRENGTH**

UNI EN ISO 3377-1  
≥ 20 N

**WATER SPOTTING**

UNI EN ISO 15700  
≥ 3 grey scale

**FINISH ADHESION**

UNI EN ISO 11640  
≥ 2 N/cm

**FLEXING ENDURANCE**

UNI EN ISO 5402  
≥ 50.000 cycles

**COLD CRACK RESISTANCE OF  
FINISH**

UNI EN ISO 3377-1  
-15° , no crack

**FIRE RESISTANCE**

UNI EN 1021-1, UNI EN 1021-2,  
BS 5852/0, BS 5852/1

**TECHNICAL SPEC.**

**THICKNESS**

0,9 - 1,0 mm

**TANNING**

mineral chrome

**COLOR TYPE**

solid tone

**DYEING**

through-dyeing Aniline



**GENERAL WARNINGS**

slight differences in colour may occur

**MAINTENANCE AND CLEANING**

dust with a soft and dry cloth; remove stains using a damp cloth and neutral soap or a delicate detergent. Buffer from the edges to the stain centre. No abrasive/aggressive products; no product for shoes cleaning; no steam; no direct sunlight; no direct heat



100% linen

## PILLING

MARTINDALE

## FIRETEST


BS 5852:1979 PART 0







Slight differences in colour may occur

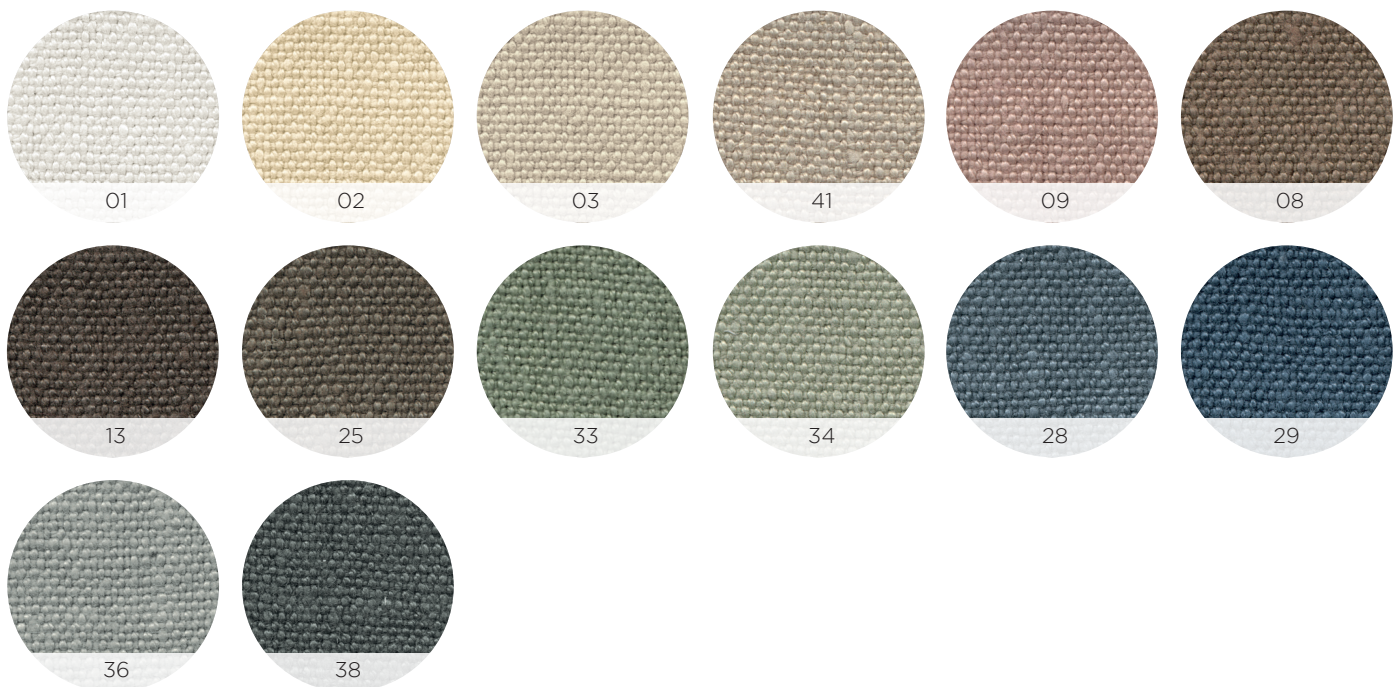



**COMPOSITION**  
46% cotton  
10% linen  
28% acrylic  
10% polyester

---

**COLOUR FASTNESS  
TO LIGHT**  
Note 5  
UNI ENI ISO 105-B02

---

**PILLING**  
Note 4-5 @ 2.000  
UNI ENI ISO 12945-2

---


**MARTINDALE**  
30.000 rubs  
UNI ENI ISO 12947-2

---

**CARE**  
    

---

**NOTES**  
Slight differences in colour may occur

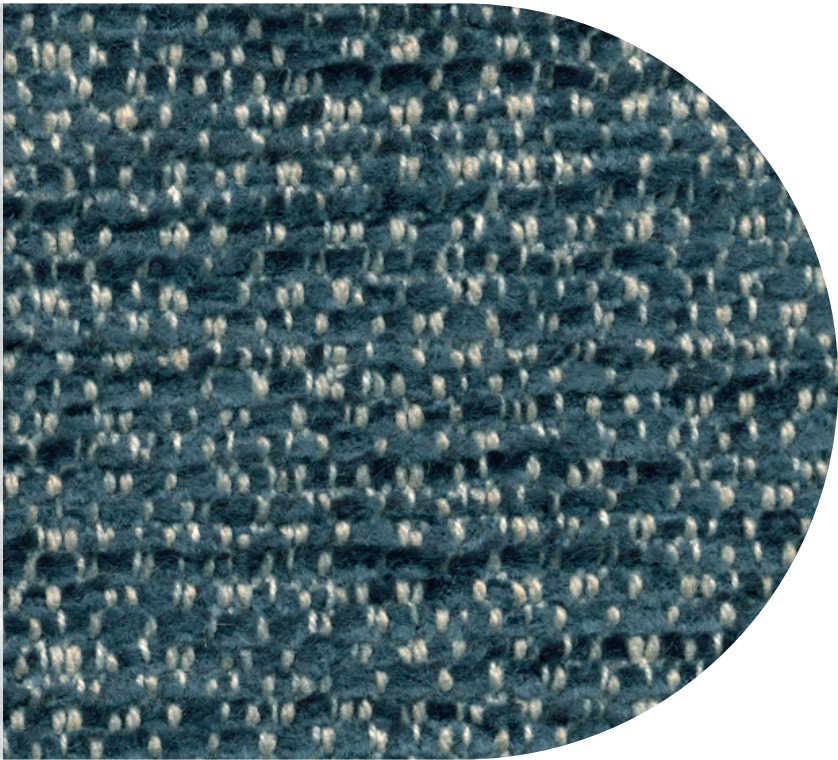



**COMPOSITION**

100% cotton

**COLOUR FASTNESS****TO LIGHT**

light color: note 3-4


dark color: note 4

EN ISO 105-B02


**MARTINDALE**

100.000 rubs

UN ENI ISO 12947-2

**CARE****NOTES**

Slight differences in colour may occur

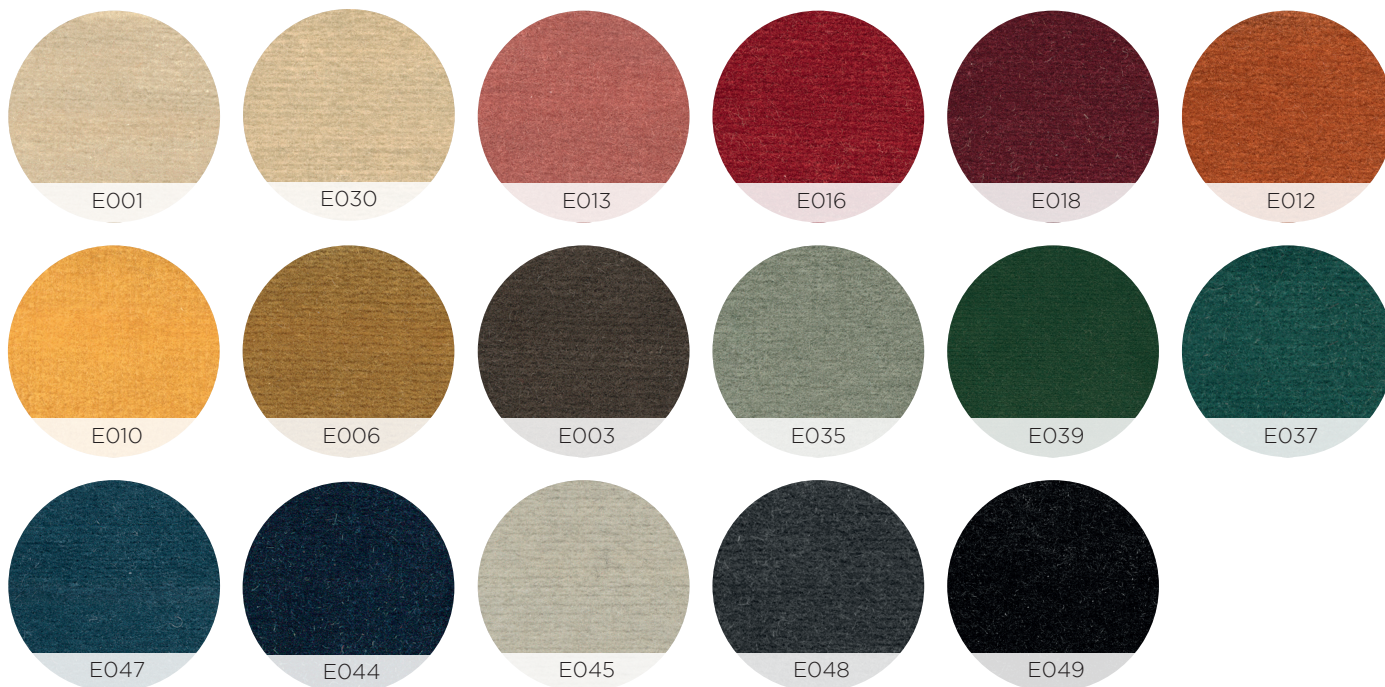



**COMPOSITION**

80% wool  
20% polyamide

**COLOUR FASTNESS  
TO LIGHT**

Note 5  
UNI EN ISO 105-B02

**PILLING**


Note 3  
UNI EN 1512434 0

**MARTINDALE**

80.000 rubs  
UNI EN ISO 12947-2

**FIRETEST**

EN 1021-1  
EN 1021-2  
A.652(16)

**CARE****NOTES**

Slight differences in colour may occur

